


RST 20i5 Einbau

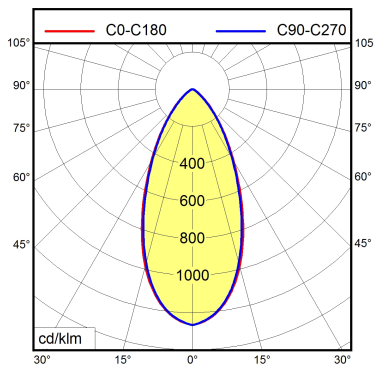

<b>light source</b>	LED
<b>work equipment</b>	adjustable electronic ballast, digital DALI
<b>connected load</b>	220-240V, 50/60Hz
<b>power consumption</b>	env. 140 W
<b>power factor</b>	env. 0,951
<b>lens</b>	N optics, narrow beam
<b>luminous flux</b>	approx. 22.000 lm
<b>luminous efficiency</b>	approx. 157 lm/W
<b>light type/-color</b>	cold white
<b>colour temperatur</b>	approx. 4.000 K
<b>color rendering index</b>	CRI > 80
<b>light distribution</b>	narrow-beam; direct; symmetric
<b>direct ratio</b>	approx. 100 %
<b>beam angle</b>	48°
<b>chromaticity tolerance LED</b>	< 3 SDCM
<b>glare control</b>	Faceted optic
<b>luminance (L65)</b>	<= 6000 cd/m <sup>2</sup>
<b>unified glare rating (4H 8H)</b>	<= 22
<b>system of protection</b>	IP 65
<b>class of protection</b>	I
<b>technology</b>	continuously dimmable; DALI
<b>operation</b>	external
<b>housing</b>	aluminium; 8; white aluminium
<b>cover</b>	Acrylic (PMMA); clear
<b>weight (net)</b>	ca. 8,2 kg
<b>mains lead</b>	built-in plug; RST 20i5 Einbau
<b>design</b>	mounted version
<b>fastening</b>	available separately
<b>accessory</b>	Junction box (RST 20i5)
<b>decorative contrast side parts</b>	Jet black
<b>life expectancy LED</b>	L80B50 60.000h