


RST 20i5 Einbau

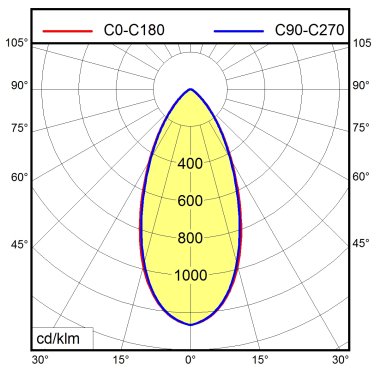

light source	LED
work equipment	adjustable electronic ballast, digital DALI
connected load	220-240V, 50/60Hz
power consumption	env. 90 W
power factor	env. 0,987
lens	N optics, narrow beam
luminous flux	approx. 15.000 lm
luminous efficiency	approx. 167 lm/W
light type/-color	cold white
colour temperatur	approx. 5.000 K
color rendering index	CRI > 80
light distribution	narrow-beam; direct; symmetric
direct ratio	approx. 100 %
beam angle	48°
chromaticity tolerance LED	< 3 SDCM
glare control	Faceted optic
luminance (L65)	<= 4200 cd/m ²
unified glare rating (4H 8H)	<= 19
system of protection	IP 65
class of protection	I
technology	continuously dimmable; DALI
operation	external
housing	aluminium; 8; white aluminium
cover	Acrylic (PMMA); clear
weight (net)	ca. 8,2 kg
mains lead	built-in plug; RST 20i5 Einbau
design	mounted version
fastening	available separately
accessory	Junction box (RST 20i5)
decorative contrast side parts	Jet black
life expectancy LED	L80B50 60.000h