


High bay luminaire ACANEO

HIAL 30000/850/W/EA


113535000-00734139

Waldmann **W**

ENGINEERS OF LIGHT

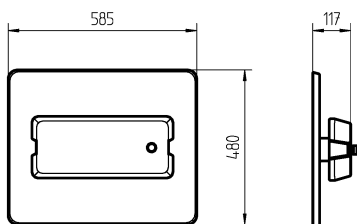

RST 25i3 Einbau

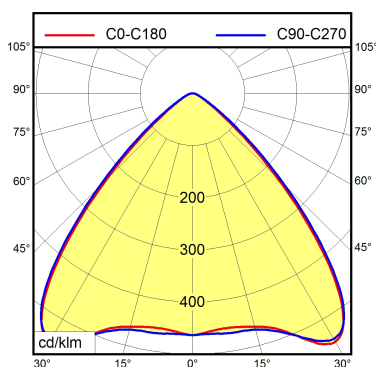

light source	LED
work equipment	electronic ballast
connected load	220-240V, 50/60Hz
power consumption	env. 206 W
power factor	env. 0,973
lens	W optics, wide beam
luminous flux	approx. 33.000 lm
luminous efficiency	approx. 160 lm/W
light type/-color	cold white
colour temperatur	approx. 5.000 K
color rendering index	CRI > 80
light distribution	wide beam; direct; symmetric
direct ratio	approx. 100 %
beam angle	88°
chromaticity tolerance LED	< 3 SDCM
glare control	Faceted optic
luminance (L65)	<= 6800 cd/m ²
unified glare rating (4H 8H)	<= 25
system of protection	IP 65
class of protection	I
technology	switchable; no notice
operation	external
housing	aluminium; 8; white aluminium
cover	Acrylic (PMMA); clear
weight (net)	ca. 10,8 kg
mains lead	built-in plug; RST 25i3 Einbau
design	mounted version
fastening	available separately
accessory	Junction box (RST 2013)
decorative contrast side parts	Jet black
life expectancy LED	L80B50 60.000h