


RST 20i5 Einbau

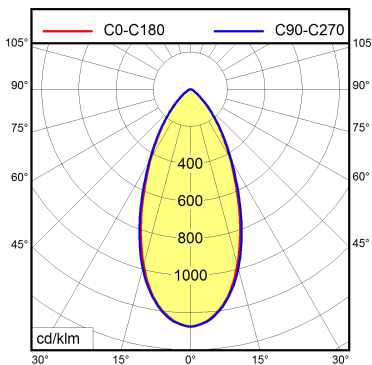

light source
work equipment
connected load
power consumption
power factor
lens
luminous flux
luminous efficiency
light type/-color
colour temperatur
color rendering index
light distribution
direct ratio
beam angle
chromaticity tolerance LED
glare control
luminance (L65)
unified glare rating (4H 8H)
system of protection
class of protection
technology
operation
housing
cover
weight (net)
mains lead
design
fastening
accessory
decorative contrast side parts
life expectancy LED

LED
 adjustable electronic ballast, digital DALI
 220-240V, 50/60Hz
 env. 262 W
 env. 0,981
 N optics, narrow beam
 approx. 40.000 lm
 approx. 153 lm/W
 cold white
 approx. 5.000 K
 CRI > 80
 narrow-beam; direct; symmetric
 approx. 100 %
 48°
 < 3 SDCM
 Faceted optic
 <= 7800 cd/m²
 <= 22
 IP 65
 I
 continuously dimmable; DALI
 external
 aluminium; 8; white aluminium
 Acrylic (PMMA); clear
 ca. 10,8 kg
 built-in plug; RST 20i5 Einbau
 mounted version
 available separately
 Junction box (RST 20i5)
 Jet black
 L80B50 60.000h