


CEE 7/VII



light source
work equipment
connected load
power consumption
luminous flux
luminous efficiency
light type/-color
colour temperatur
color rendering index
light distribution
direct ratio
beam angle
chromaticity tolerance LED
luminance (L65)
unified glare rating (4H 8H)
system of protection
class of protection
technology
operation
housing
cover
weight (net)
mains lead
design
fastening
special features

LED
 electronic transformer
 100-240 V, 50/60 Hz; secondary 24 V, DC
 env. 30 W
 approx. 2.000 lm
 approx. 77 lm/W
 cold white
 approx. 4.000 K
 CRI > 90; R9 > 50
 direct
 approx. 100 %
 110°
 < 3 SDCM
 <= 23000 cd/m²
 <= 28
 IP 20
 I with plug-in power supply; III without plug-in
 power supply
 continuously dimmable; Touch DIM
 multi-function switch
 sectional aluminium; anodised; aluminium
 coloured anodised
 Polycarbonate (PC); white opal
 ca. 1,8 kg
 ca. 4,50 m; mains plug: CEE 7/VII
 mounted version
 screw-down bracket, horizontal
 fixed connection

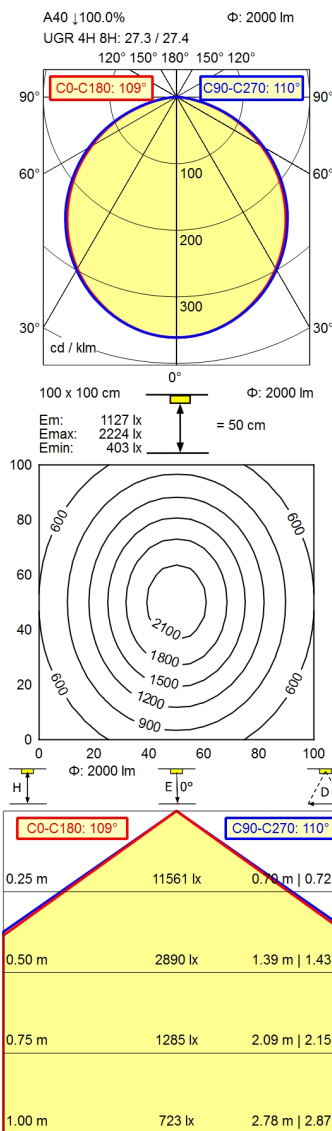