

Electronic Audible Signal Devices / Electronic Buzzers Installation 118/119

Electr. Buzzer EM Contin. tone 24VAC/DC

Part No.: 118.068.15




MECHANICAL DATA	
Height	49 mm
Diameter	43 mm
Materials	PC/ABS
Housing colour	Grey
Protection category	IP30
Connection	Flat plug
Type of fixing	Built-in mounting
Working temperature minimum	0°C
Working temperature maximum	+60°C
Weight with packaging	27 g
Product weight	23 g
ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	20 mA
Rated inrush current	50 mA
Protection class	Protection class 2
Pollution degree	2
ACUSTICAL DATA	
Volume/dB(max) at 1m distance	90,0 dB (A)
Acoustic signal image	Continuous tone
Audio frequency	2400 Hz
Acoustic service life	5,000 h minimum



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Electronic Audible Signal Devices / Electronic Buzzers Installation 118/119
Electr. Buzzer EM Contin. tone 24VAC/DC

DRAWING

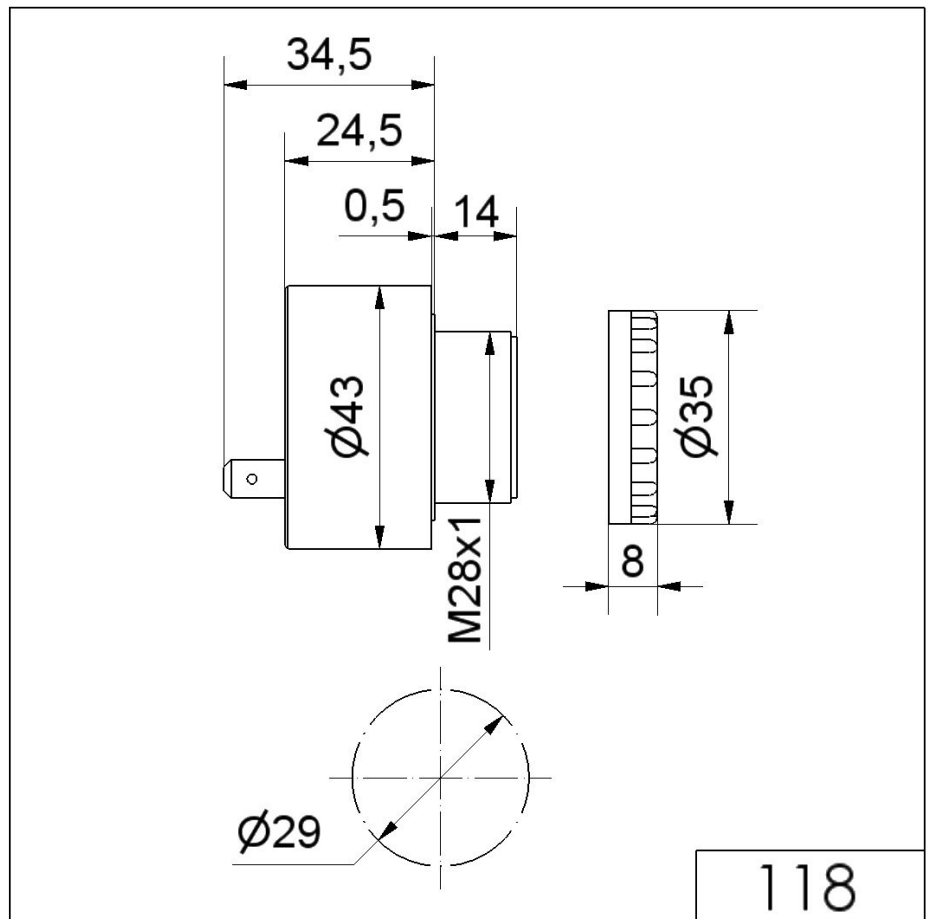

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.