

Completely pre-assembled Signal Towers / KOMPAKT 37

**K37 cable EM Pulse tone 24VAC/DC BU/CL/G**



|           |            |
|-----------|------------|
| Part No.: | 699.160.75 |
| Series:   | Kompakt 37 |



| MECHANICAL DATA              |   |
|------------------------------|---|
| Height                       | 243 mm                                  |
| Diameter                     | 38 mm                                   |
| Materials                    | PC                                      |
| Dome colour                  | Blue<br>Clear<br>Green<br>Red<br>Yellow |
| Housing colour               | Black                                   |
| Protection category          | IP65                                    |
| Connection                   | Cable                                   |
| cross-sectional area maximum | 0,34mm <sup>2</sup> / 22AWG             |
| Cable entry                  | Membrane grommet                        |
| Cable entry minimum          | d = 1 mm                                |
| Cable entry maximum          | d = 9 mm                                |
| Cable length                 | 2000 mm                                 |
| Tension relief               | Pull-out protection                     |
| Type of fixing               | Built-in mounting                       |
| Service life optical         | 50,000 h maximum                        |
| Acoustic service life        | 5,000 h minimum                         |
| Working temperature minimum  | -20°C                                   |
| Working temperature maximum  | +50°C                                   |
| UL Type Rating               | Type 12<br>Type 4X                      |
| Weight with packaging        | 158 g                                   |
| Product weight               | 113 g                                   |

| ELECTRICAL DATA             |                                |
|-----------------------------|--------------------------------|
| Operating voltage           | 24V                            |
| Operating voltage type      | AC/DC                          |
| Operating voltage frequency | 50Hz                           |
| Operating voltage tolerance | +/- 10%                        |
| Rated operational voltage   | 24 VDC                         |
| Rated operational current   | 200 mA                         |
| Rated inrush current        | 500 mA                         |
| Protection class            | Protection class 2             |
| Pollution degree            | 3<br>In the connection area: 2 |

**OPTICAL DATA**


! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37  
**K37 cable EM Pulse tone 24VAC/DC BU/CL/G**

|                      |   |
|----------------------|---|
| Light source         | LED                                     |
| Light colour         | Blue<br>Green<br>Red<br>White<br>Yellow |
| Optical signal image | Permanent                               |

| ACUSTICAL DATA                |             |
|-------------------------------|-------------|
| Volume/dB(max) at 1m distance | 85,0 dB (A) |
| Acoustic signal image         | Pulse tone  |
| Audio frequency               | 2900 Hz     |

**DRAWING**

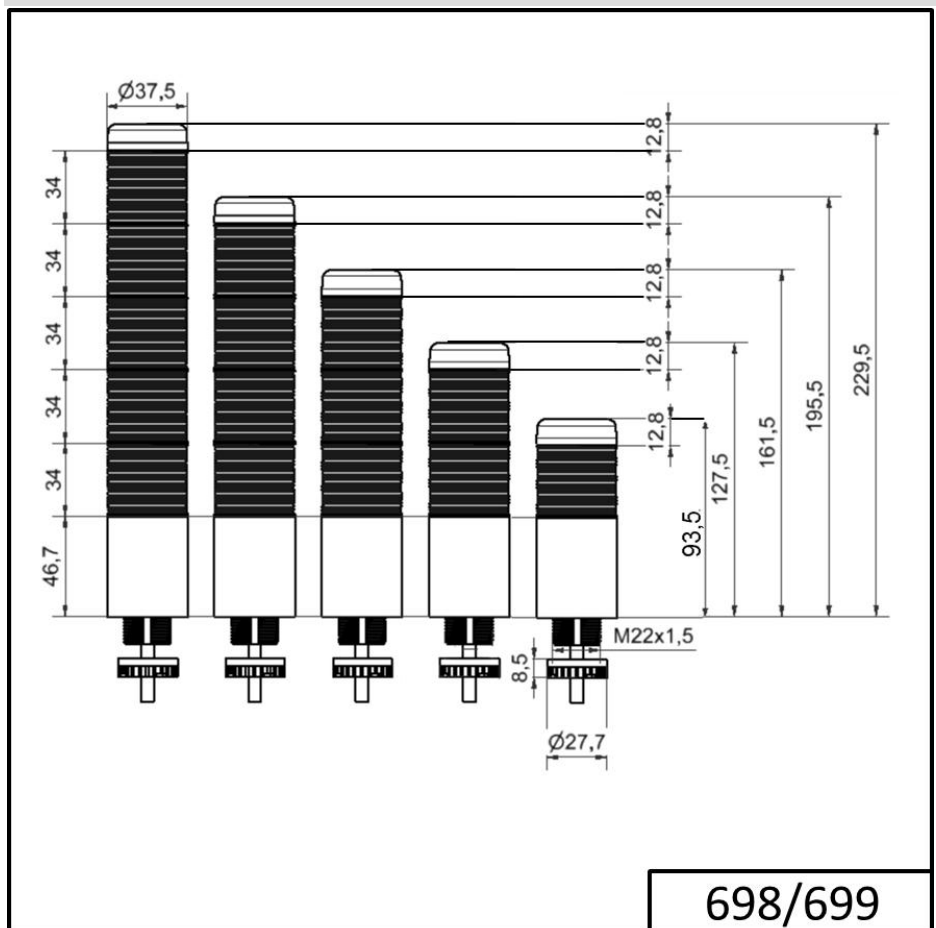

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.