

KombiSIGN 40 / ClassicLOOK

**KS40 Classic BWM 24VAC/DC GN/YE/RD**



Part No.:	639.300.01
Series:	KombiSIGN 40



MECHANICAL DATA	
Height	215 mm
Diameter	40 mm
Materials	PC
Dome colour	Green Red Yellow
Housing colour	Black
Protection category	IP66 IP69K
Connection	Push-in terminal
cross-sectional area maximum	1,50mm <sup>2</sup> / 16AWG
Cable entry	Through hole
Cable entry maximum	d = 9 mm
Tension relief	Not present
Type of fixing	Base mounting Wall mounting
Service life optical	50,000 h maximum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	210 g
Product weight	129 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	40 mA
Rated inrush current	500 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV

OPTICAL DATA	
Light source	LED
Light colour	Green Red Yellow


! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK

**KS40 Classic BWM 24VAC/DC GN/YE/RD**

Optical signal image	Blink Permanent
Blink frequency (Hz)	1 Hz

**DRAWING**

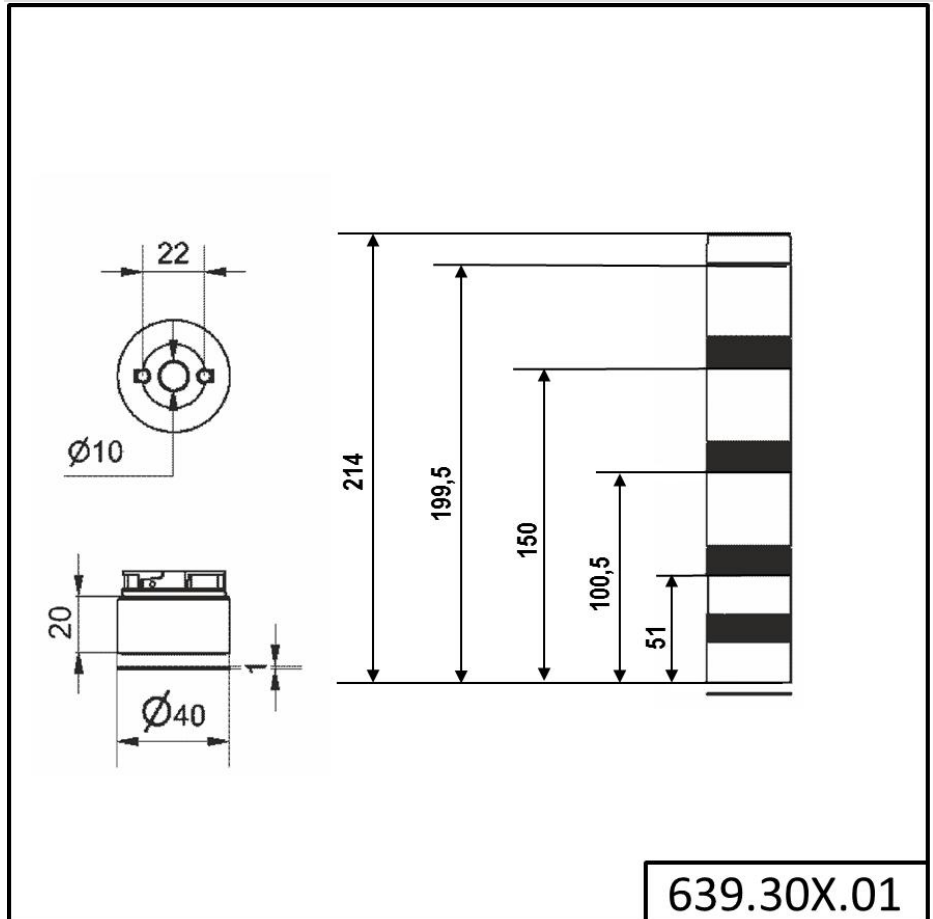

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.