


KombiSIGN 40 / ClassicLOOK  
**TwinLIGHT Classic 24VAC/DC GN**



<b>Part No.:</b>	<b>634.210.75</b>
<b>Series:</b>	<b>KombiSIGN 40</b>

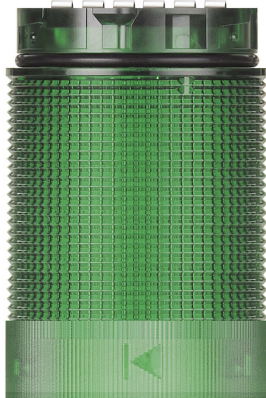

<b>MECHANICAL DATA</b>	
Height	59 mm
Diameter	40 mm
Materials	PC
Dome colour	Green
Protection category	IP66 IP69K
Service life optical	50,000 h maximum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
UL Type Rating	Type 12
Weight with packaging	39 g
Product weight	29 g

<b>ELECTRICAL DATA</b>	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	40 mA
Rated inrush current	500 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV


<b>OPTICAL DATA</b>	
Light source	LED
Light colour	Green
Optical signal image	TwinLight
Blink frequency (Hz)	1 Hz



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK  
**TwinLIGHT Classic 24VAC/DC GN**

DRAWING

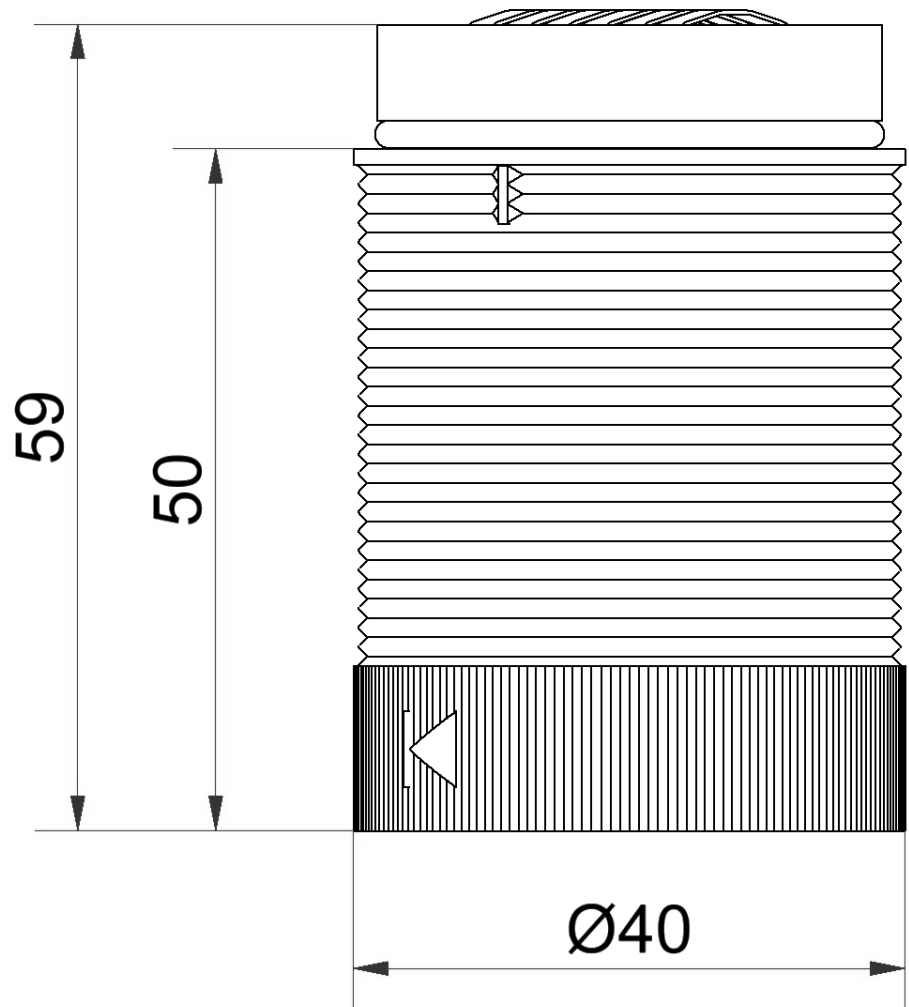

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.