

## KombiSIGN 40 / ClassicLOOK TwinLIGHT 24VAC/DC WH



<b>Part No.:</b>	<b>634.430.75</b>
<b>Series:</b>	<b>KombiSIGN 40</b>



### MECHANICAL DATA

Height	59 mm
Diameter	40 mm
Materials	PC
Dome colour	Clear
Protection category	IP66 IP69K
Service life optical	50,000 h maximum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
UL Type Rating	Type 12
Weight with packaging	38 g
Product weight	28 g

### ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	40 mA
Rated inrush current	500 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV

### OPTICAL DATA


Light source	LED
Light colour	White
Optical signal image	TwinLight
Blink frequency (Hz)	1 Hz



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK  
**TwinLIGHT 24VAC/DC WH**

**DRAWING**

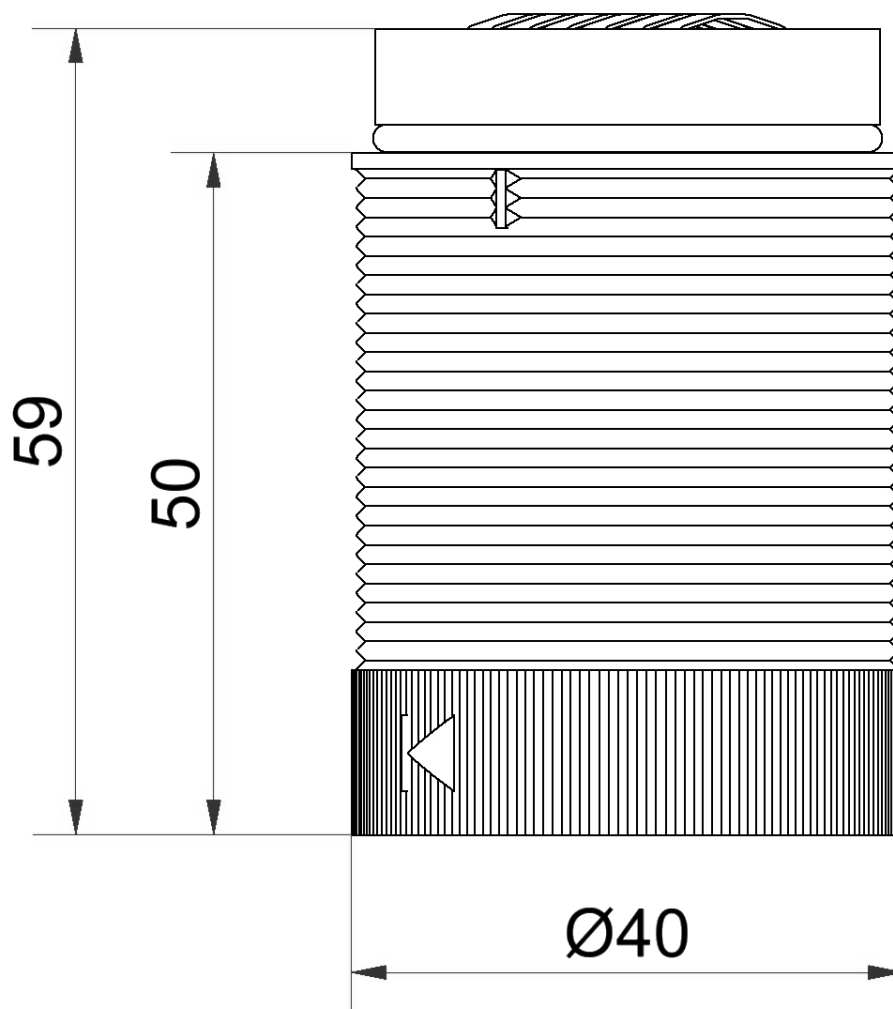

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.