

KombiSIGN 40 / ClassicLOOK

LED Perm. light element 24VDC MC



Part No.:	634.450.55
Series:	KombiSIGN 40



MECHANICAL DATA	
Height	59 mm
Diameter	40 mm
Materials	PC
Dome colour	Clear
Protection category	IP66 IP69K
Service life optical	50,000 h maximum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
UL Type Rating	Type 12
Weight with packaging	39 g
Product weight	29 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	60 mA
Rated inrush current	500 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV

OPTICAL DATA	
Light source	LED
Light colour	MC 3 colours MC 7 colours
Optical signal image	Permanent
Blink frequency (Hz)	1 Hz




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK

LED Perm. light element 24VDC MC

DRAWING

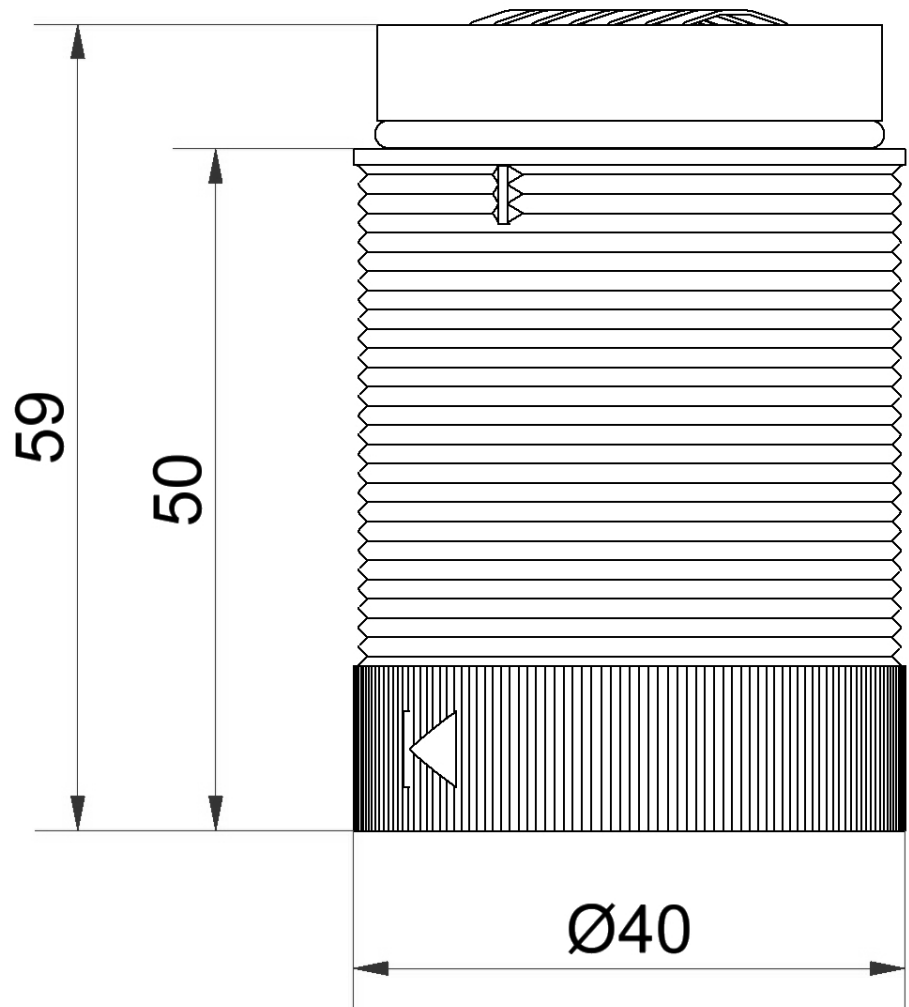

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.