

KombiSIGN 40 / ClassicLOOK

**Terminal element IO-Link 24VDC BK**



Part No.:	631.800.55
Series:	KombiSIGN 40



**MECHANICAL DATA**

Height	59 mm
Diameter	40 mm
Materials	PC
Housing colour	Black
Protection category	IP66 IP69K
Connection	Push-in terminal
cross-sectional area maximum	1,50mm <sup>2</sup> / 16AWG
Service life optical	50,000 h maximum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
UL Type Rating	Type 12
Weight with packaging	51 g
Product weight	35 g

**ELECTRICAL DATA**

Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	6 mA
Rated inrush current	400 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK

**Terminal element IO-Link 24VDC BK**

DRAWING

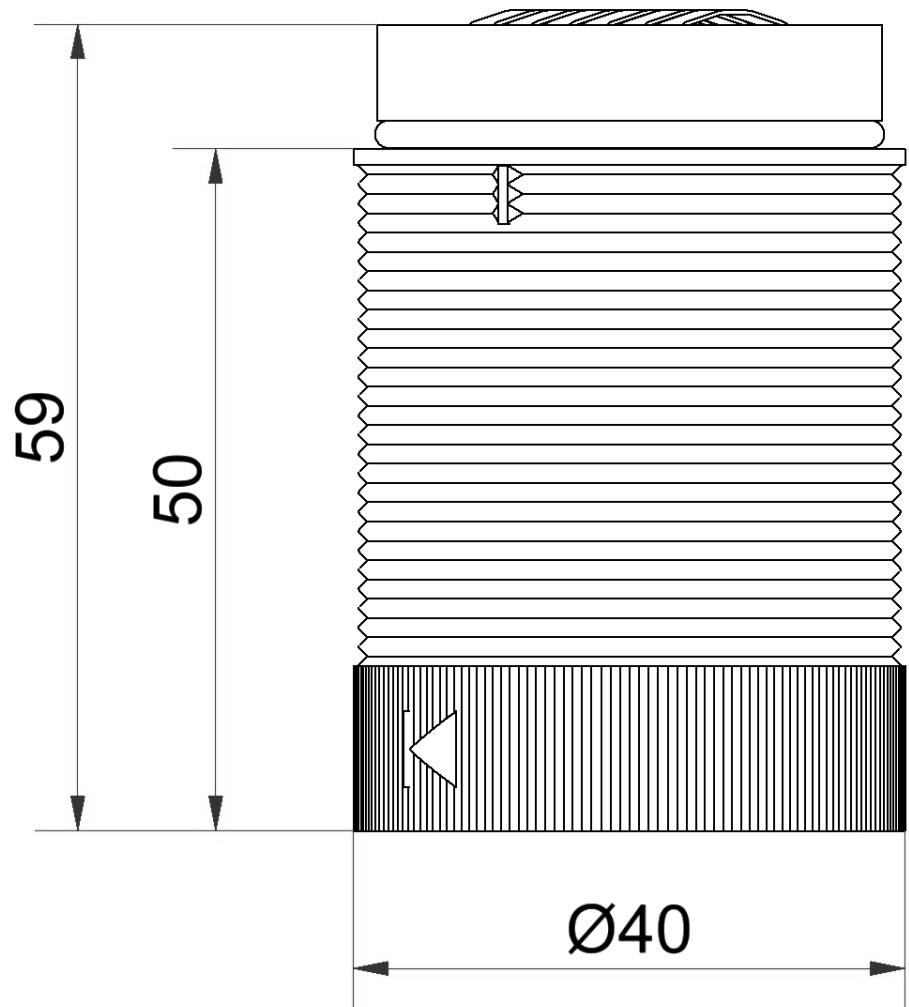

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.