

KombiSIGN 71 / LED Permanent Beacon 644 LED Perm. light element 24VAC/DC BU



Part No.:	644.500.75
Series:	KombiSIGN 71



MECHANICAL DATA

Height	66 mm
Diameter	70 mm
Materials	PC
Dome colour	Blue
Protection category	IP65
Service life optical	50,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	74 g
Product weight	59 g

ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	25 mA
Rated inrush current	100 mA
Protection class	Protection class 2
Pollution degree	3

OPTICAL DATA

Light source	LED
Light colour	Blue
Optical signal image	Permanent




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / LED Permanent Beacon 644

LED Perm. light element 24VAC/DC BU

DRAWING

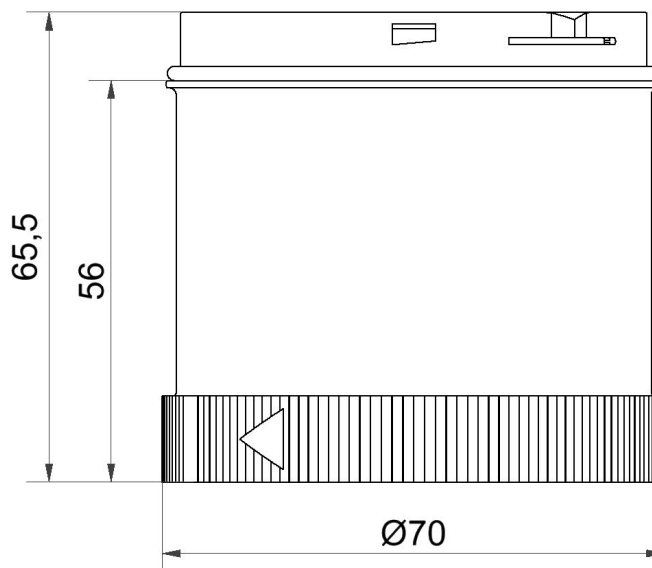

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.