

KombiSIGN 71 / LED Blinking Beacon 644

LED Blinking light element 115VAC YE

| | |
|-----------|--------------|
| Part No.: | 644.310.67 |
| Series: | KombiSIGN 71 |

**MECHANICAL DATA**

| | |
|-----------------------------|------------------|
| Height | 66 mm |
| Diameter | 70 mm |
| Materials | PC |
| Dome colour | Yellow |
| Protection category | IP65 |
| Service life optical | 50,000 h minimum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 74 g |
| Product weight | 59 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------------|
| Operating voltage | 115V |
| Operating voltage type | AC |
| Operating voltage frequency | 60Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 115 VAC |
| Rated operational current | 25 mA |
| Rated inrush current | 1.000 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |

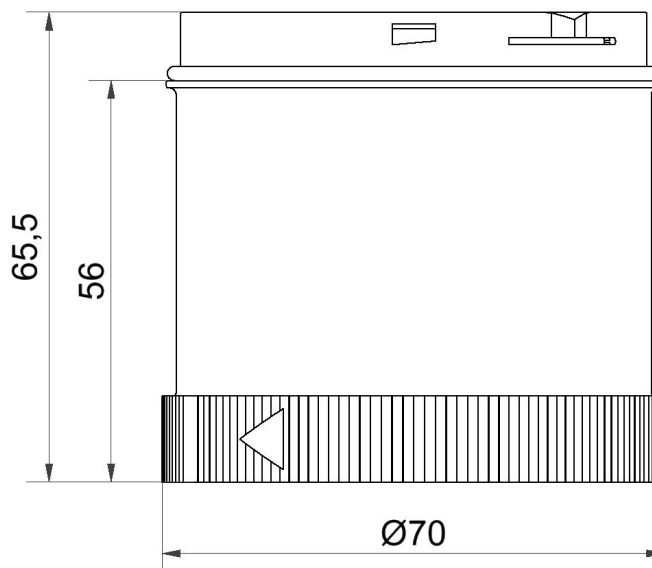
OPTICAL DATA

| | |
|----------------------|--------|
| Light source | LED |
| Light colour | Yellow |
| Optical signal image | Blink |
| Blink frequency (Hz) | 1 Hz |



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / LED Blinking Beacon 644

LED Blinking light element 115VAC YE**DRAWING**

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.