

## Modular Signal Towers / KombiSIGN 72 Element IO-Link KS71/72 24VDC CL



<b>Part No.:</b>	<b>646.440.55</b>
<b>Series:</b>	<b>KombiSIGN 71</b>



### MECHANICAL DATA

Height	66 mm
Diameter	70 mm
Materials	PC
Dome colour	Clear
Protection category	IP65
Service life optical	50,000 h maximum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
UL Type Rating	Type 12
Weight with packaging	80 g
Product weight	60 g

### ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	6 mA
Protection class	Protection class 2
Pollution degree	3




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Modular Signal Towers / KombiSIGN 72

## Element IO-Link KS71/72 24VDC CL

### DRAWING

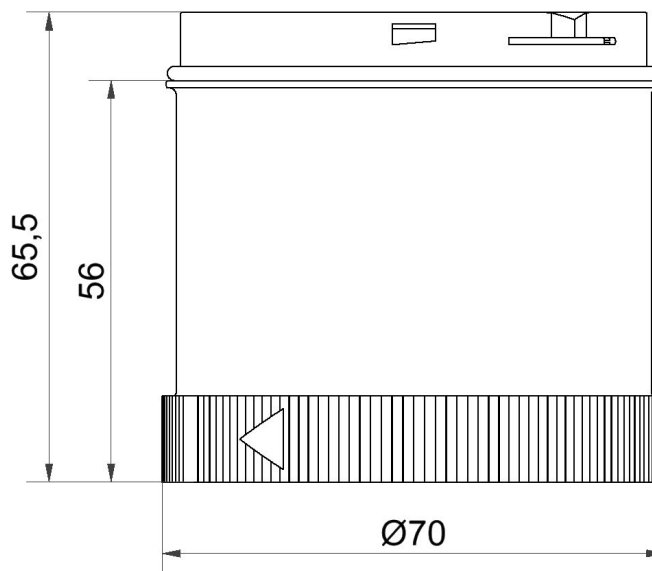

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.