

Series C1500

• Cable • Hose • Rope • Wire

**To handle 1/4" through 1" O.D.
For storage only. No live connections.**

- Reels are designed for storage of long lengths of cable, hose, rope or other materials.
- A 1-1/8" x 2-3/8" (28 mm x 60 mm) opening in the drum to initiate winding.
- Direct crank rewind, permanently attached. Removable crank option is available. Also available is a chain and sprocket rewind powered by electric, compressed air or hydraulic motor.
- Supplied with cam-lock brake on manual rewind models only.
- Optional divider discs can be placed at almost any point. Be sure to specify spacing of discs on your order.
- Rollers and roller mounting brackets are accessory items. Specify roller position.



Optional External Mounting Brackets

Part No. 9906.0027.
Add 2-1/2" to the X dimensions shown in the chart.



Standard configuration with optional slotted divider disc shown



Standard configuration with optional finish shown

PARTS DRAWING – ISO 218 (MANUAL); ISO 219 (POWER)

Model Number <small>For power rewind see Note 5</small>	Cable Capacity of Reel feet m					Approx. Weight Crank Rewind lb. kg <small>see Note 4</small>			Reel Dimensions*** in. mm						
	O.D. in. mm	1/4 6	1/2 13	3/4 19	1 25	NET	UPS/ FedEx SHIP WT.	Freight SHIP WT.	A	B	E CRANK	E POWER	F CRANK	F POWER	X
C1512-17-18	900	200	-	-	-	22	53*	57	9	4	16.5	19	16.25	14.5	7.5
	274	61	-	-	-	10	24	26	229	102	419	483	413	368	191
C1514-17-18	1300	300	150	75	23	65*	58	11	6	16.5	19	18.25	16.5	9.5	
	396	91	46	23	10	30	26	279	152	419	483	464	401	241	
C1516-17-18	-	400	-	-	-	24	68*	59	13	8	16.5	19	20.25	18.6	11.5
	-	122	-	-	-	11	31	27	330	203	419	483	514	470	292
C1520-17-18	-	650	300	150	25	80*	60	17	12	16.5	19	24.25	22.5	15.5	
	-	198	91	46	11	36	27	432	305	419	483	616	572	394	
C1526-17-18	-	900	450	225	27	98*	62	23	18	16.5	19	30.25	28.5	21.5	
	-	274	137	69	12	45	28	584	457	419	483	768	724	546	
C1530-17-18	-	1000	550	275	29	110*	64	27	22	16.5	19	34.25	32.5	25.5	
	-	305	168	84	13	50	29	686	559	419	483	870	826	648	


Notes:

1. Specifications subject to change.
2. Upon request, reels can be supplied with drum lengths other than shown and with abc sizes in other diameters.
3. Dimensions reflect pressed frames.
4. Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models (does not apply to FedEx or UPS):

	Net lbs./kg	Ship lbs./kg
Electric	18/8.2	18/8.2
Hydraulic	15/6.8	15/6.8
Air	15/6.8	15/6.8

5. When ordering power rewind models, prefix model number with:
 - A = Air Rewind - Supplied with control valve and 18" air hose.
 - E = Electric Rewind - 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.
 - HD = Hydraulic Rewind - Not supplied with control valve.

6. Be sure to check dimensions and weights prior to ordering.
*Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).
*** X, Y indicate mounting holes. See page 2.

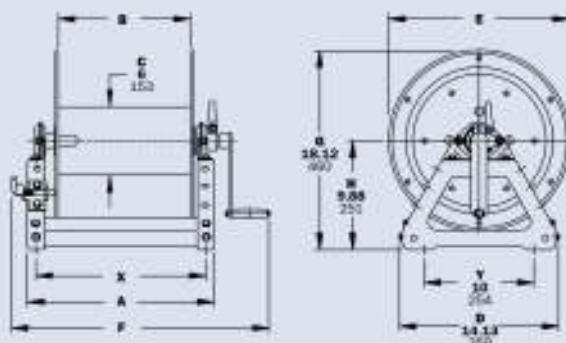

Crank rewind shown