

Electronic Audible Signal Devices / Electronic Buzzers Installation 118/119

**Electr. Buzzer EM contin/pulse 115VAC/DC**

Part No.: 119.068.27




MECHANICAL DATA	
Height	49 mm
Diameter	43 mm
Materials	PC/ABS
Housing colour	Grey
Protection category	IP30
Connection	Flat plug
Type of fixing	Built-in mounting
Working temperature minimum	0°C
Working temperature maximum	+60°C
Weight with packaging	49 g
Product weight	49 g
ELECTRICAL DATA	
Operating voltage	115V
Operating voltage type	AC/DC
Operating voltage frequency	60Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	115 VAC
Rated operational current	20 mA
Rated inrush current	<500mA
Protection class	Protection class 2
Pollution degree	2
Overvoltage category	II
Isolation voltage	U <sub>i</sub> = 250V; U <sub>imp</sub> = 2.500V
ACUSTICAL DATA	
Volume/dB(max) at 1m distance	90,0 dB (A)
Acoustic signal image	Continuous tone Pulse tone
Audio frequency	2400 Hz
Acoustic service life	5.000 h minimum



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Electronic Audible Signal Devices / Electronic Buzzers Installation 118/119  
**Electr. Buzzer EM contin/pulse 115VAC/DC**

**DRAWING**

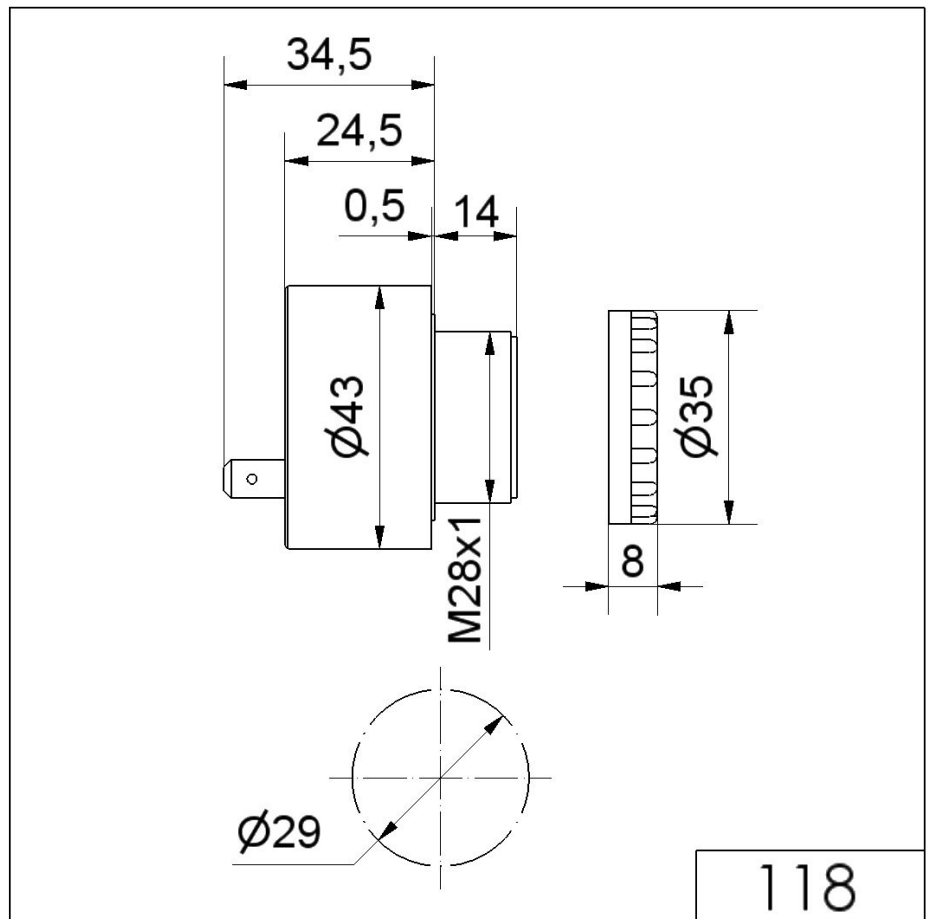

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.