

Mini free-standing Beacons / EvoSIGNAL Mini TwinLIGHT 24VAC/DC BU



| | |
|-----------|----------------|
| Part No.: | 260.510.75 |
| Series: | EvoSIGNAL Mini |



MECHANICAL DATA

| | |
|------------------------------|-----------------------------|
| Height | 85 mm |
| Diameter | 62 mm |
| Materials | PC PC/ABS |
| Dome colour | Blue |
| Housing colour | Grey |
| Protection category | IP66 |
| Connection | Push-in terminal |
| cross-sectional area minimum | 0,25mm ² / 24AWG |
| cross-sectional area maximum | 1,50mm ² / 16AWG |
| Working temperature minimum | -30°C |
| Working temperature maximum | +60°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 92 g |
| Product weight | 71 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 72 mA |
| Rated inrush current | 1600 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Oversvoltage category | I |

OPTICAL DATA


| | |
|----------------------|------------------|
| Light source | LED |
| Light colour | Blue |
| Optical signal image | TwinLight |
| Service life optical | 50,000 h minimum |



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini free-standing Beacons / EvoSIGNAL
Mini TwinLIGHT 24VAC/DC BU

DRAWING

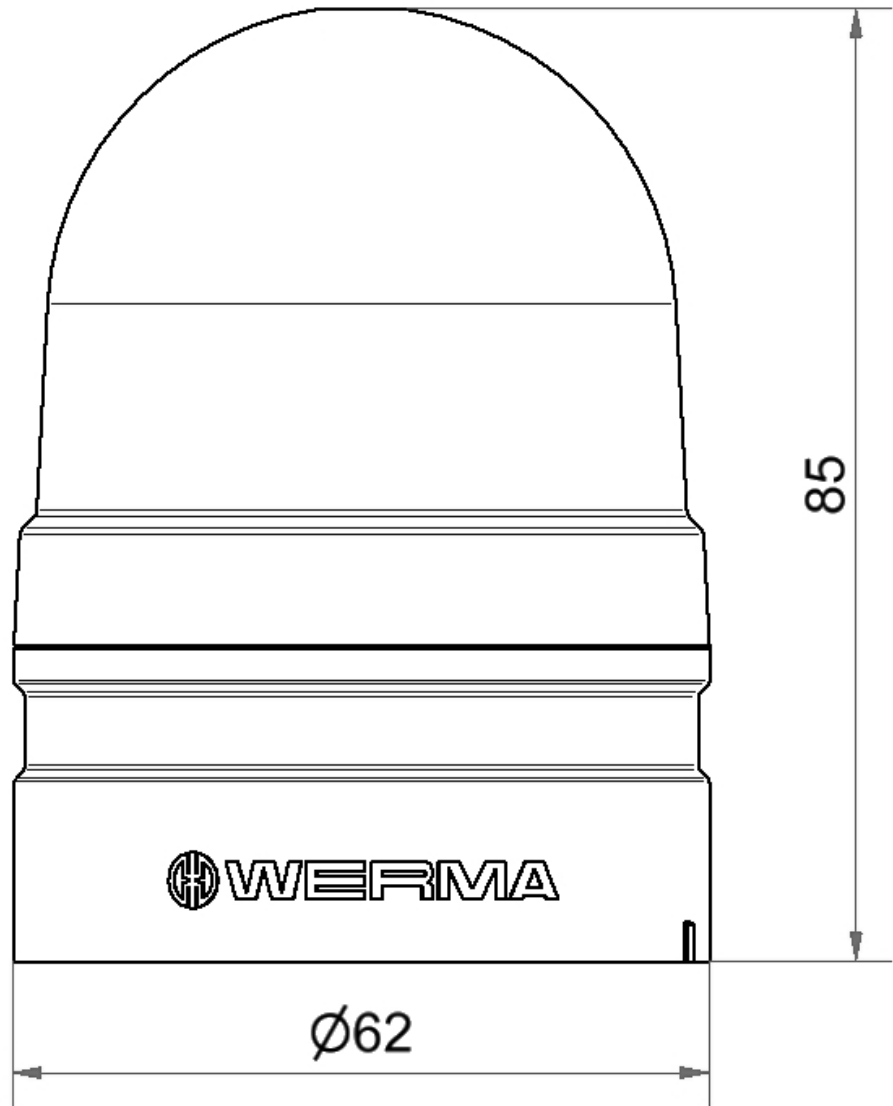

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.